

MACHINE MODEL	TORCH MODEL - DINSE ADAPTER					
	9, 17, 24 1 piece power cable		26 1 piece power cable		All Water Cooled Torches	
Miller®		KEY		KEY		KEY
Econotig	3538GT	H	3578G-GT	I	3578W-GT	K
Syncrowave 180 SD	3538GT	H	3578G-GT	I	3578W-GT	K
Syncrowave 200	3538GT	H	3578G-GT	I	3578W-GT	K
Syncrowave 210	3538GT	H	3578G-GT	I	3578W-GT	K
Syncrowave 250 DX (w/stud)	3538 + 35MA	C,L	3578G + 35MA	E,L	3578W + 35MA	J,L
Syncrowave 250 DX	3538-18	D	3578G-18	F	3578W	J
Syncrowave 350 SD, DX, LX (w/stud)	3538 + 35MA	C,L	3578G + 35MA	E,L	3578W + 35MA	J,L
Syncrowave 350 LX	3538-18	D	3578G-18	F	3578W	J
Dynasty 200 SD, DX	3538-18	D	3578G-18	F	3578W	J
Dynasty 300, 350 SD, DX, LX	3538-18	D	3578G-18	F	3578W	J
Maxstar 140	2538	A	NA		NA	
Maxstar 150 STL	2538GT	G	NA		NA	
Maxstar 200 SD, DX	3538-18	D	3578G-18	F	3578W	J
Maxstar 300, 350 SD, DX, LX	3538-18	D	3578G-18	F	3578W	J
Lincoln®						
Square Wave 175 PRO	3538GT	H	3578G-GT	I	3578W-GT	K
Square Wave 275	3538GT	H	3578G-GT	I	3578W-GT	K
Precision TIG 185	3538GT	H	3578G-GT	I	3578W-GT	K
Precision TIG 225	3538GT	H	3578G-GT	I	3578W-GT	K
Precision TIG 275 / 375	1 pc cable + PCA-2-4		3578G-18 + 35AS11	F,M	3578W + 35AS11	J,M
Invertec V155 S	2538	A	NA		NA	
Invertec V160 T	3538GT	H	3578G-GT	I	3578W-GT	K
Invertec V205 T	3538GT	H	3578G-GT	I	3578W-GT	K
Invertec V310 T	3538GT	H	3578G-GT	I	3578W-GT	K
Invertec V311 T	3538GT	H	3578G-GT	I	3578W-GT	K
ESAB®						
Miniarc 90	2538	A	NA		NA	
Miniarc 140	2538	A	NA		NA	
Miniarc 150	2538	A	NA		NA	
Heliarc 161	3538-18	D	3578G	E	3578W	J
Heliarc 252 / 352	1 pc cable + PCA-2-4		3578G-18 + 35AS11	F,M	3578W + 35AS11	J,M
Thermal Arc®						
ArcMaster 160 TS	3538-18	B	NA		NA	
ArcMaster 185	3538-18	D	3578G-18	F	3578W	J
ArcMaster 200	3538-18	D	3578G-18	F	3578W	J
ArcMaster 300 TS	3538-18	D	3578G-18	F	3578W	J
ArcMaster 400 TS	3538-18	D	3578G-18	F	3578W	J
P-Wee 160 TS	2538-18	B	NA		NA	
Pro-Plus 400 GTS	3538-18	D	3578G-18	F	3578W	J
Pro-Plus 400 MST	3538-18	D	3578G-18	F	3578W	J
Pro-Wave 185 GTSW	3538-18	D	3578G-18	F	3578W	J
Pro-Wave 300 GTSW	3538-18	D	3578G-18	F	3578W	J
Pro-Wave 400 GTSW	3538-18	D	3578G-18	F	3578W	J
Pro-Lite 250 TS	3538-18	D	3578G-18	F	3578W	J
Pro-Lite LS-300	3538	C	3578G	E	3578W	J
Hobart®						
TIGMATE	3538GT	H	3578G-GT	I	3578W-GT	K

DIMENSIONAL INFORMATION

STANDARD

25 mm



Small Dinse Connector

11/32" Diameter

35/50 mm



Large Dinse Connector

1/2" Diameter

GAS THRU

25 mm GT



Small "GT" Dinse Connector (GT = Gas Thru)

11/32" Diameter

35/50 mm GT



Large "GT" Dinse Connector (GT = Gas Thru)

1/2" Diameter




L

35MA Stud Machine



M

35AS11

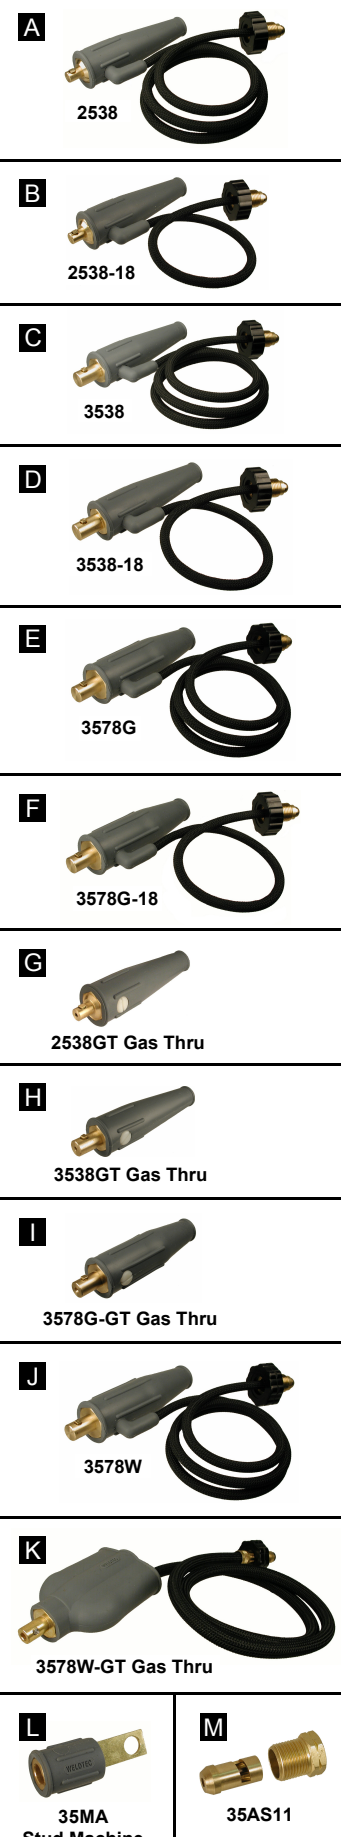

Note: Threaded stud machine & engine drives use 1/2" threaded studs, use 35MA machine adapter plus dinse adapter.